



PRODUCT ADVANTAGES

- **Compact glasswasher:** installation height of only 705 mm or with integrated reverse osmosis 820 mm
- **VISIOTRONIC-TOUCH control:** colour touchscreen (displays text and graphic) in conjunction with single-button control and remaining cycle time indication
- **SmartConnect app:** controlling your warewash operation with smart technology: status and messages, usage and operating costs, hygiene and service
- **CLIP-IN wash and rinse system:** easy removal without any tools
- **Intelligent data documentation:** automatic recording of important operational data and consumptions and indication on the display
- **USB-interface:** comfortable download of operational data in form of a protocol via USB
- **GENIUS-X² fine filter system:** advanced filter system with pre-wash function reduces detergent consumption up to 35 %
- **Intensive programme:** intensive rinse cycle to wash glasses with critical design with raised fresh-water amount
- **Interlocked strainer:** prevents operation without tank strainer
- **Optional refill signal:** monitors contents of external as well as integrated chemical containers
- **Hygiene programme (in combination with Hygiene-Tab INTENSIV)** for removal of calcium carbonate and other deposits from wash chamber
- **Thermolabel 71 °C:** default temperatures setting acc. European DIN can be switched by operator to a higher thermolabel setting
- **WATERMARK APPROVED**

TECHNICAL DATA


| | |
|----------------------|---------------------------------|
| Cycle times* | 1. 75sec 2. 120sec. |
| Water consumption | 1.7 l/rack |
| Tank capacity | 8 litres |
| Tank heating | 0.8 kW |
| Power supply | 240 / 50 / 1 (415 / 50 / 3N) |
| Booster loading | |
| Standard | 2.8 kW |
| Alternative | 4.1 kW |
| Total loading | |
| Standard | 3.2 kW 15A |
| Alternative | 4.6 kW 15A (3ph) |
| Wash pump | 0.4 kW 160 l/min |
| Rack size | 400 x 400 mm |
| Loading height | 315 mm |
| Noise level | 57 dB (A) |
| Weight (gross / net) | 64 / 58 kg |

*Supplied with 150mm adjustable legs

*Thermostop guarantees required temperatures with cold water and / or 240 V connection, the actual cycle times extend accordingly.

For machine protection the water hardness should not exceed 3°dH, if higher we recommend using an integrated water softener or an external water softener of the product line HYDROLINE PROTECT.

DIMENSIONAL DRAWING

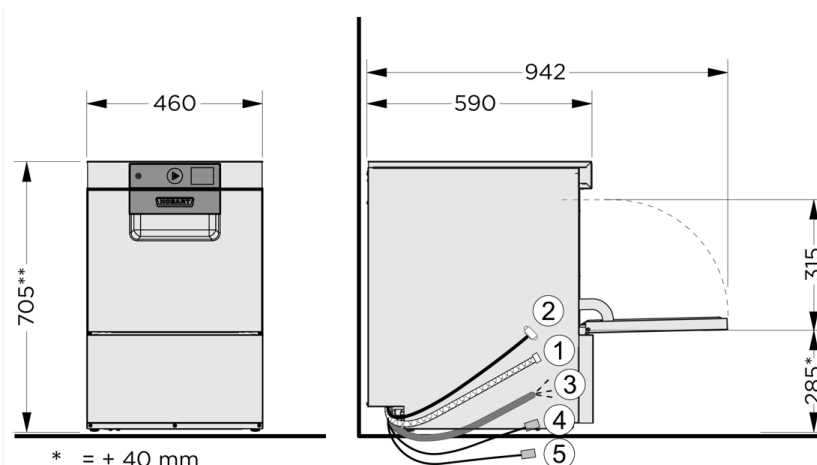

* = + 40 mm

** = 815 mm with integrated osmosis

*** = + 150mm adjustable legs

CONNECTIONS

| | |
|------------------------------------|--------------------------------------|
| ① Drain hose | 2,000 mm ID20/OD25 |
| Reverse Osmosis unit (ROI or RO-S) | Independent gravity waste to tundish |
| ② Supply hose | 2,000 mm R 3/4" |
| Required flow rate | 5 l/min |
| Flow pressure | 0.5 (0.8 with softener)-6 bar |
| Max. supply water temperature | 60 °C GC 35 °C GCROI |
| ③ Power cord | 2,000 mm |
| Supply hose for | |
| ④ Detergent | 2,500 mm |
| ⑤ Rinse aid | 2,500 mm |