HOBART



TECHNICAL DATA

Knife Size	330 mm
Speeds	Variable 4 speed automatic
Stroke Length	3 different
Maximum Cut Thickness	25 mm
Carriage Capacity	305mm wide / 190mm diameter
Safety	Knife ring guard
	Removable Knifer
	Gauge plate interlock
	Air piston lift mechanism
	Home position to start
Drive Mechanism	Poly V Belt
Motor Size	0.37 kW
Shipping Weight	67 kg

PRODUCT ADVANTAGES


- Operator safety is Number 1 combined with, durability, sanitation and performance
- New EASY-LIFT mechanism to raise & lower machine for cleaning underneath
- 330mm stainless steel CLEAN CUTT 100% REMOVABLE KNIFE for ease of cleaning and maximum hygiene
- Variable 4 speed automatic carriage & 3 stroke lengths
- Gauge plate (slice thickness) interlock - gauge plate must be closed to remove carriage
- No volt release if power fails or plug is removed slicer must be switched on again to re-start
- Carriage system interlock gauge plate indicator must be closed to open or remove
- Carriage system can be tilted open or removed for cleaning
- "Home" position to start—for operator safety carriage must be in home position to start machine


DIMENSIONAL DRAWING

 CONNECTIONS

 Power Supply
 240/50/1 - 10amp

 Power Cord
 10amp plug & lead



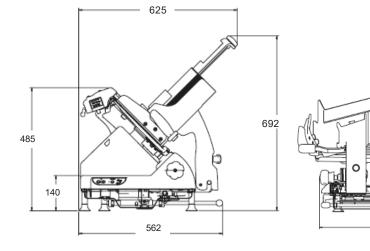

- Borazon stone long life sharpening attachment
- Sanitary & heavy-duty stainless steel gauge plate, carriage face plate and knife cover
- Sanitary anodized aluminium base
- Permanently mounted knife ring guard - maximum safety when cleaning
- Low fence as standard
- Optional accessoriy food chute

664